


Installation Guide

Picture 1

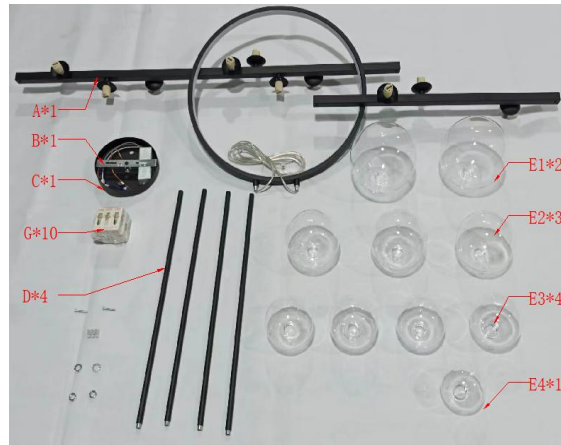


Parts List:A*1,B*1,C*1,D*4,G*10,E1(150MM)*2,E2(120MM)*3,E3(100MM)*4,E4(80MM)*1

Picture 2



Step 1: Thread the wire from A through D and twist D onto A.

Picture 3

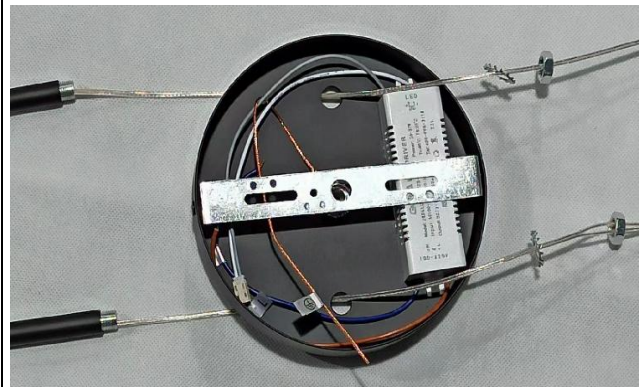


Step 2: The nut locks C and D together.

Picture 4




Step 3: Fix B on the customer-supplied junction box with screws.

Picture 5

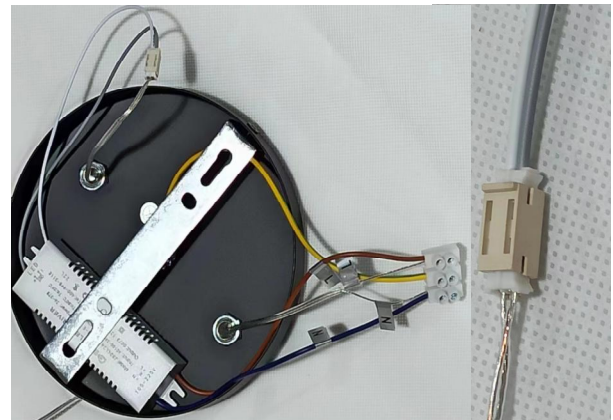


Step 4: Wiring as shown in the picture, note: the wires of the LED are connected to the driver, and the wires of the G9 lamp head should not be connected to the driver.

Picture 6

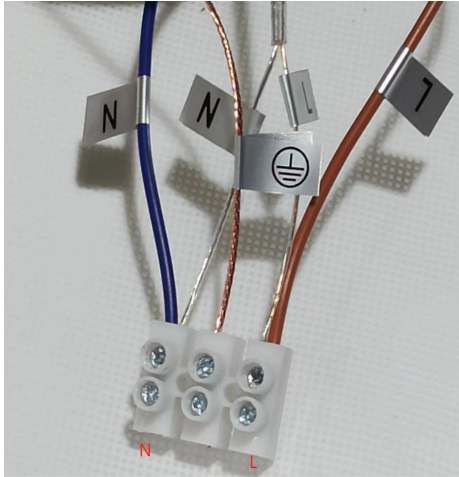

Step 5: Corresponding wire connection.

Picture 7

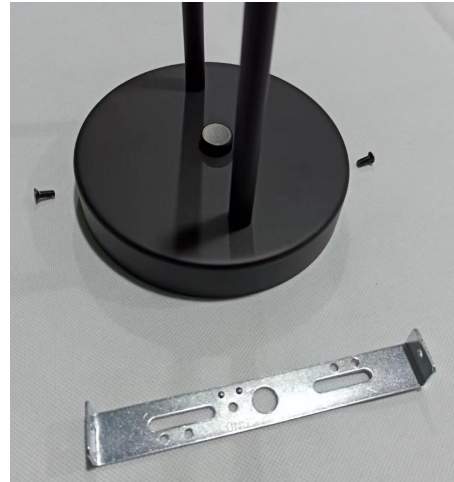


Step 6: Fix C to B with screws.

Picture 8




Step 7: Insert G into the lamp head.

Picture 9

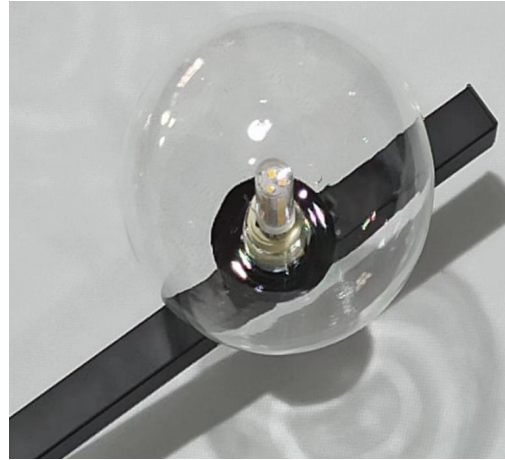

Step 8: Install E1, E2, E3, E4 in A respectively.

Picture 10

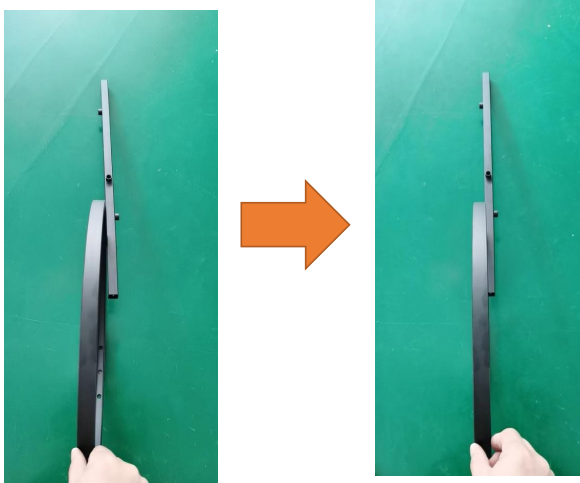

Step 9: If the light pole is skewed during installation, just straighten it by hand and then install it.

Picture 11



Completion.