


Installation Guide

Picture 1





Picture 2

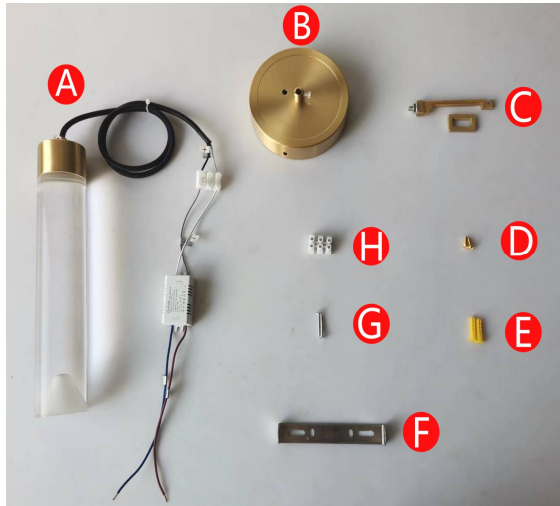

Parts List: A*1;B*1;C*1;D*2;E*2;F*1;G*2; H*1 (Do not remove the driver on the wire, first use A to test the power to ensure that the lamp is powered on normally.)


Step 1: Fix C on top of B as shown in the picture.

Picture 3

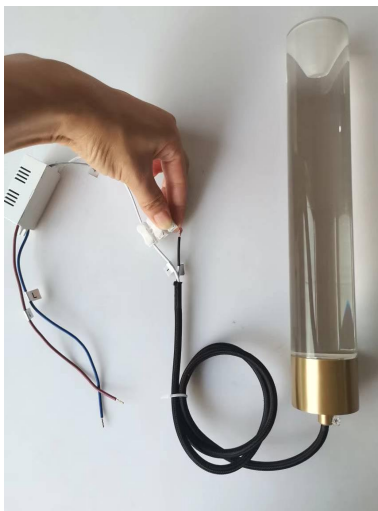

Step 2: As shown in the picture, press the wire on the A light frame with your hands to separate the driver end, and pass the A light frame wire into the B ceiling.

Picture 5

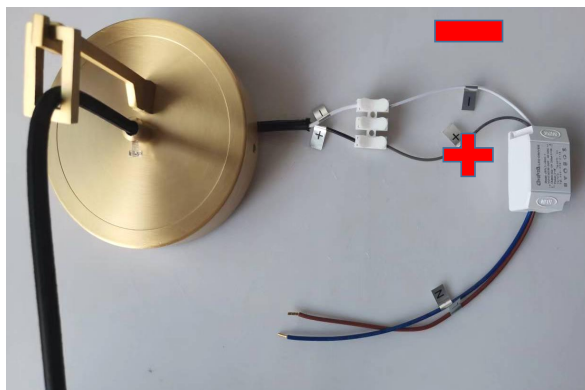

Picture 6



Step 3: Connect according to the diagram. (Note: Be sure to connect the separate drivers with the wires on the A lamp holder according to the same + - sign. If you connect them directly, the light source will burn out, and the lamp will not light if you connect them backwards.)

Completion.